

# Posi-Tector®


## ON PRESS Blanket/Plate/Packing Gauge

Offered in **Ferrous** or **Ferrous/Non-Ferrous** Configurations

### Ideal For:

### Determining Blanket/Plate and Packing Thickness while ON press cylinders

- Instant Reading, No Calibration needed
- Probes Available in Ferrous or NON-Ferrous Options
- Temperature Compensated
- Stainless Steel Probe & 2' Wire
- Make-Ready & Blanket Adjust Time Saver
- Use on > Blankets, Aluminum or Polyester Plates

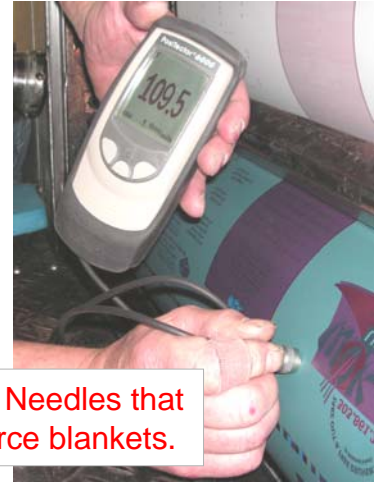

**No** Needles that pierce blankets.



**FTS-1 Ferrous Probe**



**FNTS-1  
Ferrous or  
NON-Ferrous Probe**

**Interchangeable Probes**  
Solvent, Acid, Water, Oil & Dust Resistant  
Includes Shock Absorbing Protective Cover  
2 Year Warranty



**PosiTector** is suitable for use on blanket or aluminium and polyester plates applied to a Ferrous (FTS-1) or NON-Ferrous (FNTS-1) substrate and uses the properties of the substrate material to determine the material thickness.



- Easy
- Quick
- Accurate

### **FTS & FNTS Model Probe**

<b>Probe Models:</b>	<b>FTS &amp; FNTS</b>
<b>Range:</b>	0 -250 mils
	0 - 6 mm
<b>Accuracy*:</b>	± (0.5 mils + 1%) 0 - 100 mils
	± (0.5 mil + 3%) > 100 mils
	± (0.01 mm + 1%) 0 - 2.5 mm
	± (0.01 mm + 3%) > 2.5 mm

**For more information contact:**

\*Accuracies are stated as a fixed value plus a percentage of the gage's actual reading.